


EXA
FWD
HNB/G
USB/G
FAB/G
FGB/G
FVB
FWB/G
FHB
FLB
AB
AG
AP/
AD
APK/
ADK
DryAir
EX-
XPLNprf
XPLNprf
HVB/
HVL
S ◇ B/
NAB
LAD/
NAD
Water-
Rela
NP/NAP/
NVP
SNP
CHB/G
MXB/G
Other
valves
SWD/
MWD/
DustColl
CVE/
CVSE
CCH/
CPE/D
LifeSci
Gas-
Combust
Auto-
Water
Outdoor
SpecFld
Custom
Ending



Pilot operated 2-port valve for dust collector
(Large port size dust collector)


PD3/PDV3-20A/25A/40A Series

- Air operated/with solenoid valve
- Port size: Rc3/4, Rc1, IN: Rc1¹/₂-OUT: ø48, Rc1¹/₂




JIS symbol

- PD3 (Air operated)



- PDV3 (With solenoid valve)



Common specifications

Item	Air operated		With solenoid valve	
	PD3		PDV3	
Working fluid			Air (no corrosive gas)	
Min. working pressure differential MPa			0.1 (≈15 psi, 1 bar)	
Max. working pressure differential MPa			0.7 (≈100 psi, 7 bar)	
Max. working pressure MPa			0.7 (≈100 psi, 7 bar)	
Proof pressure (water pressure) MPa			2.0 (≈290 psi, 20 bar)	
Fluid temperature °C			-10 (14°F) to 60 (140°F), -10 (14°F) to 100 (212°F) for fluoro rubber seal (no freezing)	
Ambient temperature °C			-10 (14°F) to 60 (140°F), -10 (14°F) to 100 (212°F) for fluoro rubber seal	
Atmosphere			Place free of corrosive gas and explosive gas	
Valve structure			Pilot operated poppet structure	
Valve seat leakage cm ³ /min			300 or less, urethane rubber used for sealant material: 50 or less	
Pilot port size			Rc1/8	
Mounting orientation			Unrestricted	
Working environment			Indoors/outdoors	Indoors
Electrical specifications			PDV3	
Rated voltage			100 VAC (50/60 Hz)/110 VAC (60 Hz), 200 VAC (50/60 Hz)/220 VAC (60 Hz), 12 VDC, 24 VDC	
Voltage fluctuation range			-10 to +10% of rated voltage	
Apparent power (VA)	Holding	7.5(50 Hz), 5.5(60 Hz)		
	Starting	20(50 Hz), 17(60 Hz)		
Power consumption (W)	AC	4.0(50 Hz), 3.4(60 Hz)		
	DC	6.5		
Thermal class			Class 130 (B) (coil option 4A: Class 180 (H) or equivalent)	
Degree of protection			IP65 or equivalent (*1)	

*1 : The T type terminal box is IP61 or equivalent.

Individual specifications

Item	Port size	Orifice size (mm)	Cv	Weight (kg)
Model No.				
● Air operated				
PD3-20A	Rc3/4	23	11	0.26
PD3-25A	Rc1	28	18	0.40
PD3-40A	IN:Rc1 ¹ / ₂ - OUT: ^{O.D. ø48} _{Length 52}	37	45	0.86
PD3-40A-RC	Rc1 ¹ / ₂	37	45	0.75
● With solenoid valve				
PDV3-20A	Rc3/4	23	11	0.41
PDV3-25A	Rc1	28	18	0.55
PDV3-40A	IN:Rc1 ¹ / ₂ - OUT: ^{O.D. ø48} _{Length 52}	37	45	1.01
PDV3-40A-RC	Rc1 ¹ / ₂	37	45	0.90

*1 : For a solenoid valve for driving the air operated PD3, use FAB31-6-3 (page 52), AB31-01-3 (page 154), AB41E4-02-3-03T (explosion proof, page 424) or PJVB (page 842).

*2 : The combination of PD3 and PJVB is recommended for outdoor use.

*3 : Contact CKD when using as a dust collector for ash treatment or combustion gas at a waste incinerator.

How to order

● Air operated

PD3 - 20A - N

● With solenoid valve

PDV3 - 20A - N 2C - AC100V

Model No.

A Port size
*2

B Sealant
*2
*3
*4

C Coil option
*4
*5

D Voltage
*5
*6

[Example of model No.]

PDV3-20A-2C-AC100V

Model : PDV3

- A** Port size : Rc3/4
- B** Sealant : Urethane rubber
- C** Coil option : Grommet lead wire
- D** Voltage : 100 VAC(50/60 Hz)/110 VAC(60 Hz)

		Model No.	
		PD3	PDV3
Code	Description		
A Port size			
20A	Rc3/4	●	●
25A	Rc1	●	●
40A	IN: Rc1½, OUT: O.D. ø48, length 52	●	●
40A-RC	Rc1½	●	●
B Sealant			
Blank	Urethane rubber	●	●
N	Nitrile rubber	●	●
F	Fluoro rubber	●	●
C Coil option			
2C	Std. Grommet lead wire		●
2CS	Grommet lead wire with surge suppressor		●
2E	With DIN terminal box (G1/2)		●
2ES	With DIN terminal box/surge suppressor (G1/2)		●
2G	With DIN terminal box (Pg11)		●
2H	DIN terminal box/with lamp (Pg11)		●
2HS	DIN terminal box with lamp/surge suppressor (Pg11)		●
2CG	Conduit (CTC19)		●
2CH	Conduit (G1/2)		●
3T	With T type terminal box (G1/2)		●
3R	T type terminal box with lamp (G1/2)		●
3RS	T type terminal box with lamp/surge suppressor (G1/2)		●
4A	Grommet lead wire (thermal class H or equivalent)		●
D Voltage			
AC100V	100 VAC(50/60 Hz)/110 VAC(60 Hz)		●
AC200V	200 VAC(50/60 Hz)/220 VAC(60 Hz)		●
DC24V	24 VDC		●
DC12V	12 VDC		●

*1 : The combinations indicated with ● above are available.

*2 : Item **B** Blank (sealant material: urethane rubber) is not available when port size is 40A or 40A-RC.

*3 : When Item **B** is N or F (sealant material: nitrile rubber or fluoro rubber), the main valve material is nylon resin.

*4 : For PDV3 Series, when Item **B** is F (sealant material: fluoro rubber), only 4A is available for Item **C** (coil option).

*5 : When Item **C** (coil option) is 4A, only AC voltage is available.



*6 : For voltages other than above, contact CKD.

EXA
FWD
HNB/G
USB/G
FAB/G
FGB/G
FVB
FWB/G
FHB
FLB
AB
AG
AP/
AD
APK/
ADK
DryAir
EX-
XPLNprf
XPLNprf
HVB/
HVL
S ♂ B/
NAB
LAD/
NAD
Water-
Rela
NP/NAP/
NVP
SNP
CHB/G
MXB/G
Other
valves
SWD/
MWD
DustColl
CVE/
CVSE
CCH/
CPE/D
LifeSci
Gas-
Combus
Auto-
Water
Outdoor
SpecFld
Custom
Ending

PD3/PDV3 Series

Internal structure and parts list: Air operated

● Sealant material: Urethane rubber
PD3-20A/25A

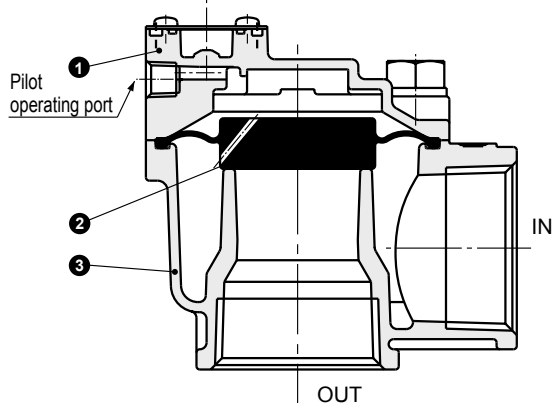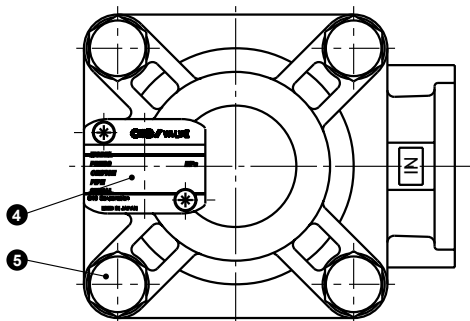


● Sealant material: Nitrile rubber/fluoro rubber
PD3-20A/25A/40A-

N	F
---	---

 *1
PD3-40A-RC-

N	F
---	---


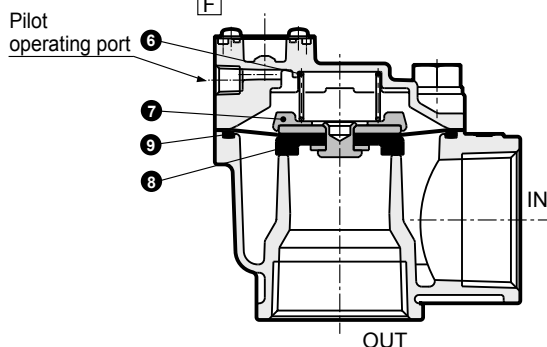


*1 : The shape of 40A body is different from the figure above.

No.	Part name	Material
1	Cover	ADC12 : Aluminum die-casting
2	Diaphragm	U : Urethane rubber
3	Body	ADC12 : Aluminum die-casting
4	Nameplate	A1200P : Aluminum
5	Hexagon head bolt	SUSXM7 : Stainless steel
6	Spring	SUS304 : Stainless steel
7	Spacer	PA : Nylon resin
8	Diaphragm assembly	SUS304, PA : Stainless steel, nylon resin NBR or FKM : Nitrile rubber or fluoro rubber
9	O-ring	NBR or FKM : Nitrile rubber or fluoro rubber

Internal structure and parts list: With solenoid valve

● Sealant material: Urethane rubber
PDV3-20A/25A-2C (Grommet lead wire)

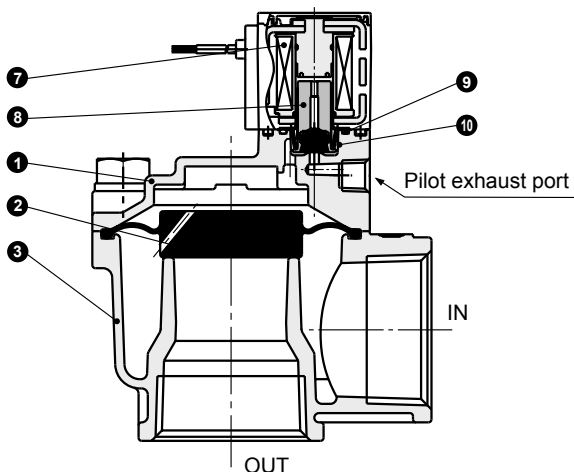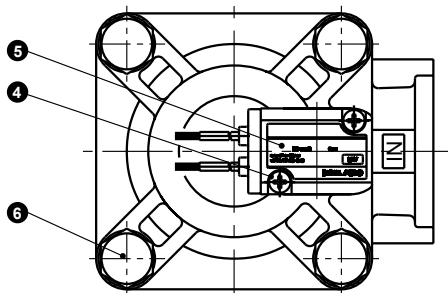


● Sealant material: Nitrile rubber/fluoro rubber
PDV3-20A/25A/40A-

N2C	F4A
-----	-----

 *1
PDV3-40A-RC-

N2C	F4A
-----	-----

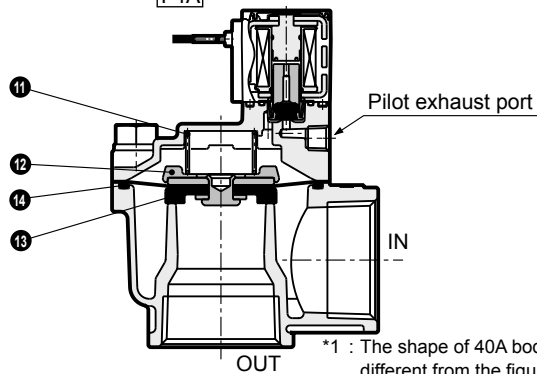



*1 : The shape of 40A body is different from the figure above.

No.	Part name	Material
1	Cover	ADC12 : Aluminum die-casting
2	Diaphragm	U : Urethane rubber
3	Body	ADC12 : Aluminum die-casting
4	Phillips pan head machine screw, captive spring washer	SWRM : Carbon steel wire for cold rolling
5	Nameplate	PET : Polyethylene terephthalate
6	Hexagon head bolt	SUSXM7 : Stainless steel
7	Coil assembly	Class B molded coil
8	Plunger assembly	K-M31, NBR or FKM : Stainless steel/nitrile rubber or fluoro rubber
9	O-ring	NBR or FKM : Nitrile rubber or fluoro rubber
10	Plunger spring	SUS304 : Stainless steel
11	Spring	SUS304 : Stainless steel
12	Spacer	PA : Nylon resin
13	Diaphragm assembly	SUS304, PA : Stainless steel, nylon resin NBR or FKM : Nitrile rubber or fluoro rubber
14	O-ring	NBR or FKM : Nitrile rubber or fluoro rubber

Dimensions: PD3 Series





- Air operated
- PD3-20A/25A
- PD3-40A-RC

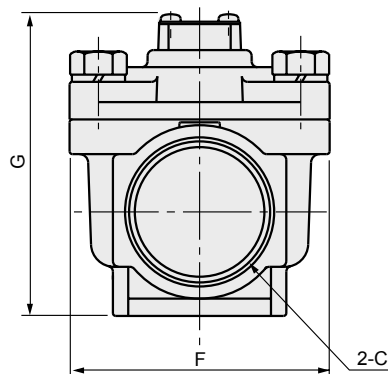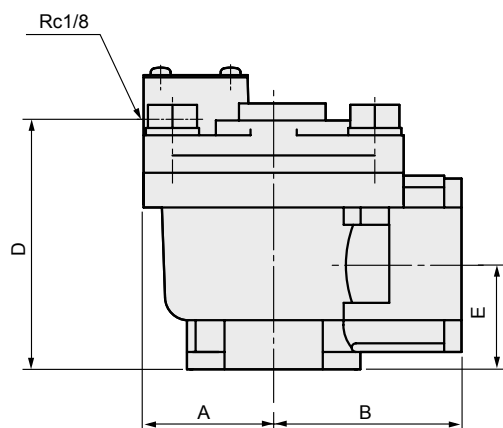

Model No.	A	B	C	D	E	F	G
PD3-20A	31.5	40	Rc3/4	64	31	60	83
PD3-25A	37.5	45	Rc1	76	39	71	95
PD3-40A-RC	45	65	Rc1½	86	36	90	105

- Air operated
- PD3-40A

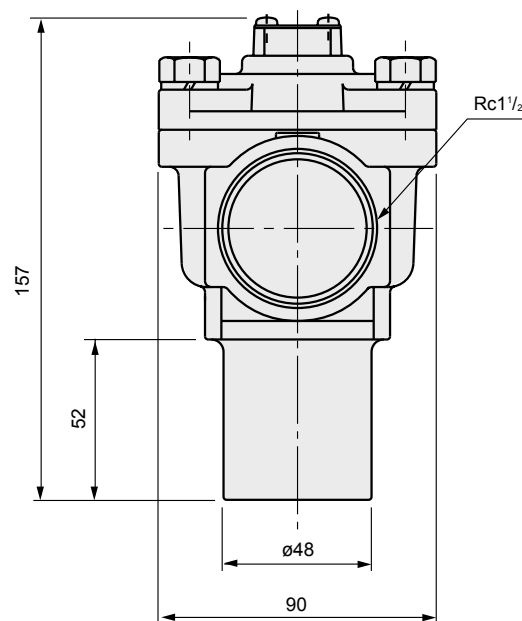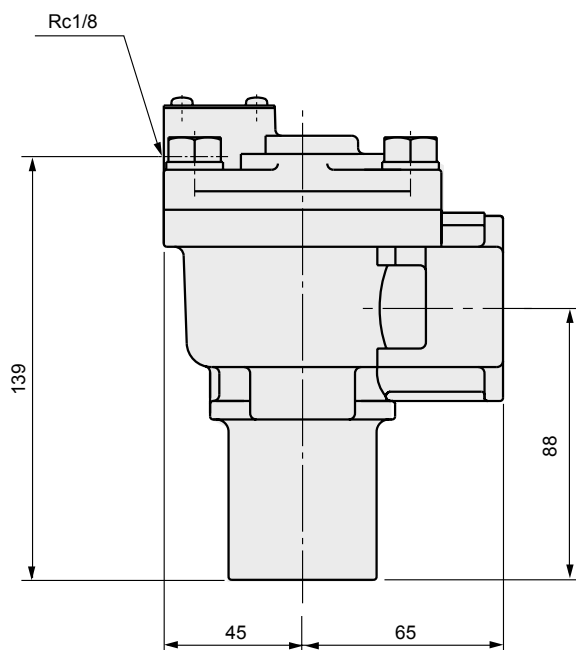

EXA
FWD
HNB/G
USB/G
FAB/G
FGB/G
FVB
FWB/G
FHB
FLB
AB
AG
AP/AD
APK/ADK
DryAir
EX-XPLNprf
XPLNprf
HVB/HVL
S [◇] B/NAB
LAD/NAD
Water-Rela
NP/NAP/NVP
SNP
CHB/G
MXB/G
Other valves
SWD/MWD
DustColl
CVE/CVSE
CCH/CPE/D
LifeSci
Gas-Combus
Auto-Water
Outdoor
SpecFld
Custom
Ending

PD3/PDV3 Series

EXA

FWD

HNB/G

USB/G

FAB/G

FGB/G

FVB

FWB/G

FHB

FLB

AB

AG

AP/AD

APK/ADK

DryAir

EX-XPLNprf

XPLNprf

HVB/HVL

S ⬆ B/ NAB

LAD/NAD

Water-Rela

NP/NAP/NVP

SNP

CHB/G

MXB/G

Other valves

SWD/MWD

DustColl

CVE/CVSE

CCH/CPE/D

LifeSci

Gas-Combust

Auto-Water

Outdoor

SpecFld


Custom

Ending

Dimensions: PDV3 Series




- Grommet lead wire with solenoid valve
PDV3-20A/25A-2C
PDV3-40A-RC

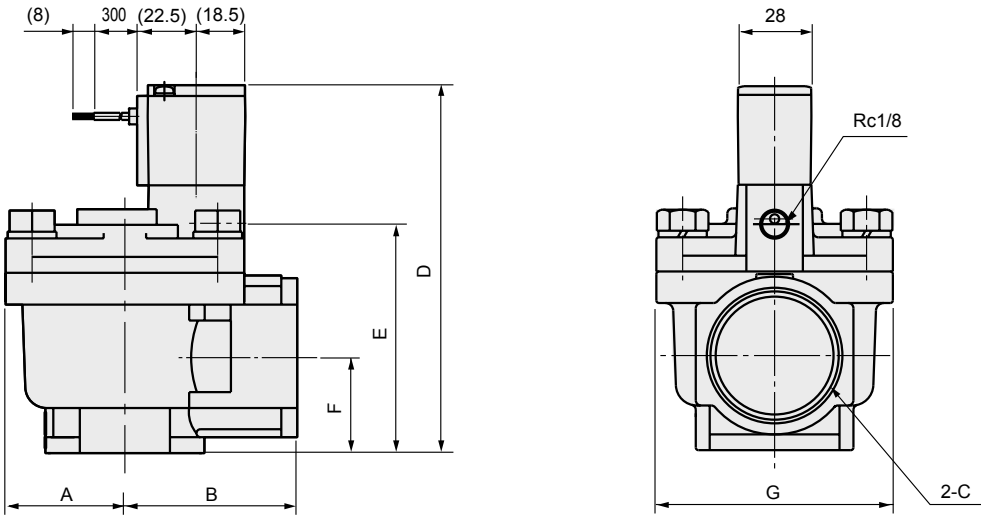

Model No.	A	B	C	D	E	F	G
PDV3-20A	31.5	40	Rc3/4	117	64	31	60
PDV3-25A	37.5	45	Rc1	129	76	39	71
PDV3-40A-RC	45	65	Rc1½	140	87	36	90

- Grommet lead wire with solenoid valve
PDV3-40A-2C

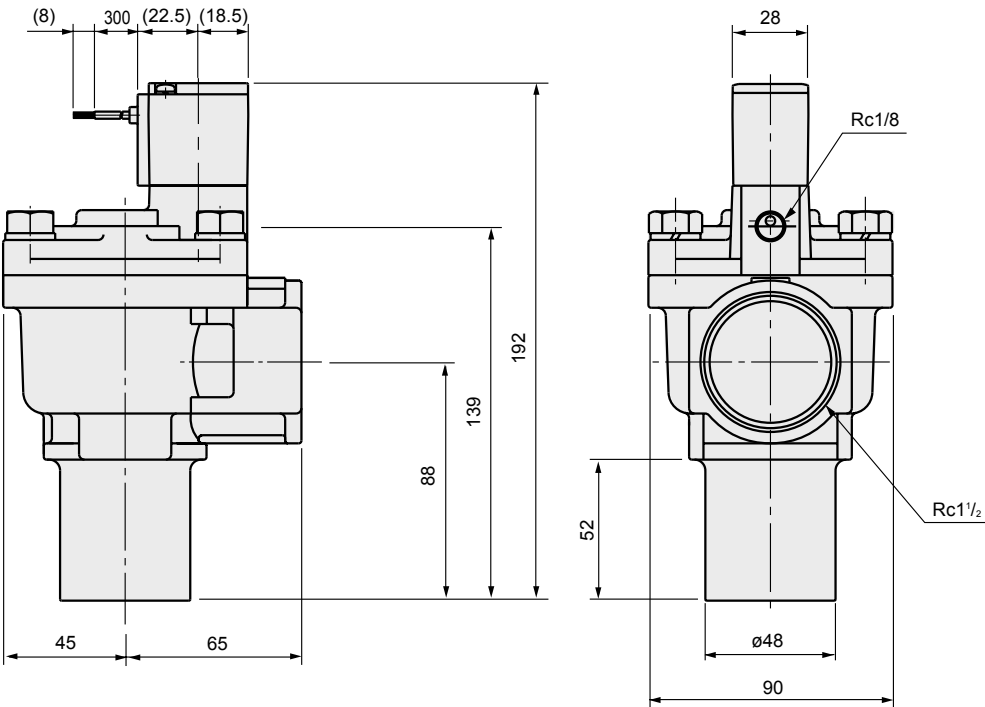


Optional dimensions



● DIN terminal box (with lamp/surge suppressor)


DIN terminal box with lamp

PDV3-*
2E/2ES
2G
2H/2HS

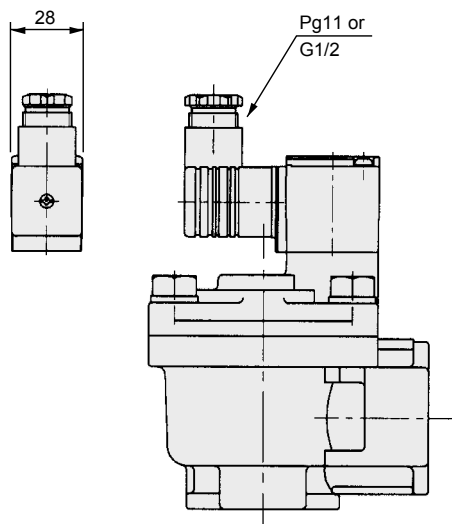

● Conduit (CTC19 / G1/2)


PDV3-*
2CG
2CH

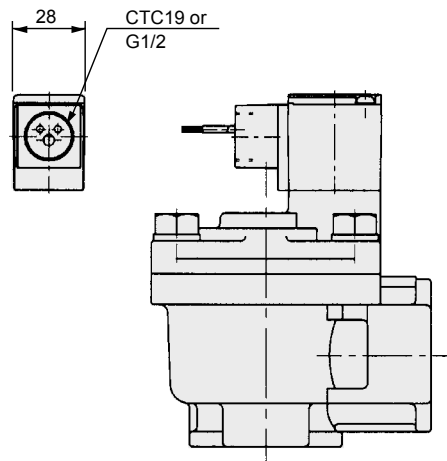


● T type terminal box (G1/2) (with lamp/surge suppressor)

T type terminal box with lamp (G1/2)

PDV3-*
3T
3R
3RS

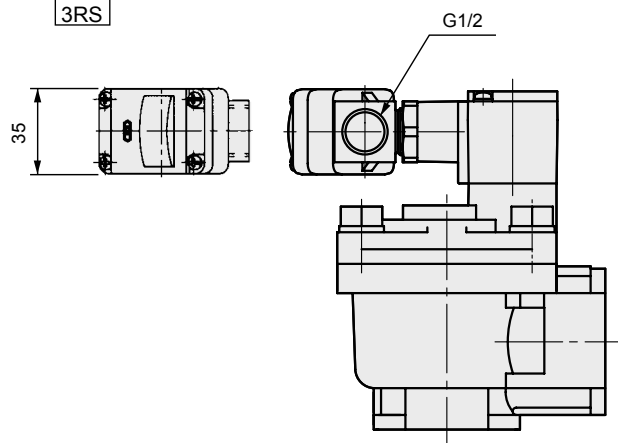

EXA
FWD
HNB/G
USB/G
FAB/G
FGB/G
FVB
FWB/G
FHB
FLB
AB
AG
AP/ AD
APK/ ADK
DryAir
EX- XPLNprf
XPLNprf
HVB/ HVL
S $\diamond$ B/ NAB
LAD/ NAD
Water- Rela
NP/NAP/ NVP
SNP
CHB/G
MXB/G
Other valves
SWD/ MWD
DustColl
CVE/ CVSE
CCH/ CPE/D
LifeSci
Gas- Combus
Auto- Water
Outdoor
SpecFld
Custom
Ending



Pilot operated 2-port valve for large-diameter dust collector
(Large port size dust collector)


PD3/PDV3-65A/80A Series

- Air operated/with solenoid valve
- Port size: Rc2¹/₂, Rc3




JIS symbol

- PD3 (air operated)



- PDV3 (with solenoid valve)



Common specifications

Item	Air operated		With solenoid valve	
	PD3		PDV3	
Working fluid			Air (no corrosive gas)	
Min. working pressure differential	MPa	0.2 (≈29 psi, 2 bar)		
Max. working pressure differential	MPa	0.8 (≈120 psi, 8 bar)		
Max. working pressure	MPa	0.8 (≈120 psi, 8 bar)		
Proof pressure (water pressure)	MPa	1.5 (≈220 psi, 15 bar)		
Fluid temperature	°C	-10 (14°F) to 60 (140°F) (no freezing)		
Ambient temperature	°C	-10 (14°F) to 60 (140°F)		
Atmosphere			Place free of corrosive gas and explosive gas	
Valve structure			Pilot operated poppet structure	
Valve seat leakage	cm³/min	300 or less		
Pilot port size		Rc1/4	-	
Mounting orientation			Unrestricted	
Working environment		Indoors/outdoors	Indoors	
Electrical specifications			PDV3	
Rated voltage		100 VAC(50/60 Hz)/110 VAC(60 Hz), 200 VAC(50/60 Hz), 220 VAC(50/60 Hz)		
Voltage fluctuation range		-10 to +10% of rated voltage		
Apparent power (VA)	Holding	7.5(50 Hz), 5.5(60 Hz)		
	Starting	20(50 Hz), 17(60 Hz)		
Power consumption (W)	AC	4.0(50 Hz), 3.4(60 Hz)		
Thermal class		Class 130 (B)		
Degree of protection		IP65 or equivalent		

- *1 : Use PJVB-8-5 as a solenoid valve for driving the air operated PD3.
 *2 : Contact CKD when using as a dust collector for ash treatment or combustion gas at a waste incinerator.
 *3 : The combination of PD3 and PJVB-8-5 is recommended for outdoor use.

Individual specifications

Item	Port size	Orifice size (mm)	Cv	Weight (kg)
Model No.				
● Air operated				
PD3-65A	Rc2 ¹ / ₂	68	100	3.2
PD3-80A	Rc3	82	155	4.6
● With solenoid valve				
PDV3-65A	Rc2 ¹ / ₂	68	100	3.4
PDV3-80A	Rc3	82	155	4.8

PD3/PDV3-65A/80A Series

How to order

How to order

● Air operated

PD3 - 80A - N

● With solenoid valve

PDV3 - 80A - N 2C - AC200V

Model No.

A Port size

B Sealant

C Coil option

D Voltage

[Example of model No.]

PDV3-80A-N2C-AC200V

Model: PDV3

A Port size : Rc3

B Sealant : Nitrile rubber

C Coil option : Grommet lead wire

D Voltage : 200 VAC(50/60 Hz)

		Model No.	
Code	Description	PD3	PDV3
A Port size			
65A	Rc2½	●	●
80A	Rc3	●	●
B Sealant			
N	Nitrile rubber	●	●
C Coil option			
2C	Standard	Grommet lead wire	●
2E	Option	With DIN terminal box (G1/2)	●
2G		With DIN terminal box (Pg11)	●
2H		DIN terminal box/with lamp (Pg11)	●
D Voltage			
AC100V	100 VAC(50/60 Hz), 110 VAC(60 Hz)		●
AC200V	200 VAC(50/60 Hz)		●
AC220V	220 VAC(50/60 Hz)		●

EXA
FWD
HNB/G
USB/G
FAB/G
FGB/G
FVB
FWB/G
FHB
FLB
AB
AG
AP/
AD
APK/
ADK
DryAir
EX-
XPLNprf
XPLNprf
HVB/
HVL
S B/
NAB
LAD/
NAD
Water-
Rela
NP/NAP/
NVP
SNP
CHB/G
MXB/G
Other valves
SWD/
MWD
DustColl
CVE/
CVSE
CCH/
CPE/D
LifeSci
Gas-
Combus
Auto-
Water
Outdoor
SpecFld
Custom
Ending


Features

(1) Large flow rate

Port sizes 65A and 80A added to the PD3/PDV3 Series.

(2) RoHS compliant

Dust collector valve control system example

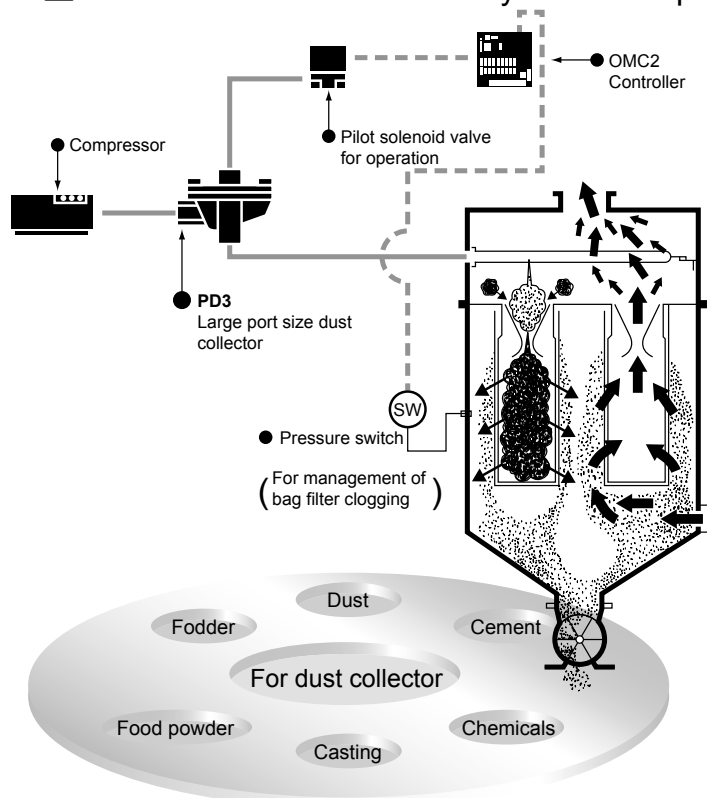


PD3/PDV3-65A/80A Series

EXA
FWD
HNB/G
USB/G
FAB/G
FGB/G
FVB
FWB/G
FHB
FLB
AB
AG
AP/ AD
APK/ ADK
DryAir
EX- XPLNprf
XPLNprf
HVB/ HVL
S ◇ B/ NAB
LAD/ NAD
Water- Rela
NP/NAP/ NVP
SNP
CHB/G
MXB/G
Other valves
SWD/ MWD
DustColl
CVE/ CVSE
CCH/ CPE/D
LifeSci
Gas- Combus
Auto- Water
Outdoor
SpecFld
Custom
Ending

Internal structure and parts list: Air operated

- Sealant material: Nitrile rubber
- PD3-65A/80A-N

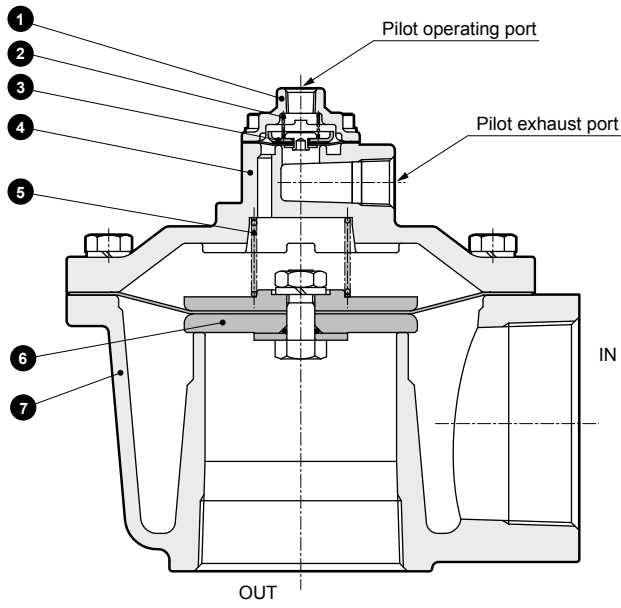


No.	Part name	Material
1	Cap	ADC12 Aluminum die-casting
2	Pilot spring	SUS304 Stainless steel
3	Pilot diaphragm assembly	SUS304,NBR: Stainless steel, nitrile rubber PTFE Tetrafluoroethylene resin
4	Body	AC4C Aluminum casting
5	Mainspring	SUS304 Stainless steel
6	Main diaphragm assembly	SUS304,A2017: Stainless steel, aluminum NBR,PA Nitrile rubber, nylon resin
7	Body	AC4C Aluminum casting

PD3/PDV3-65A/80A Series

Internal structure and parts list

Internal structure and parts list: With solenoid valve

- Sealant material: Nitrile rubber
- PDV3-65A/80A-N

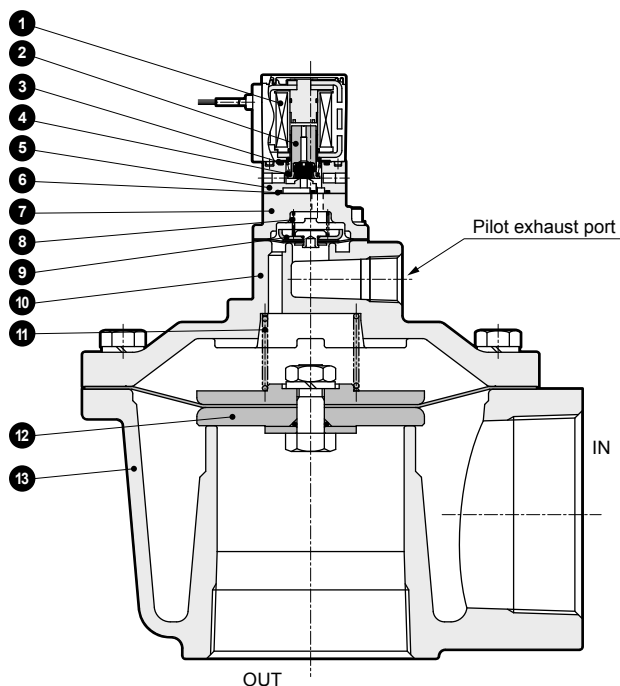

No.	Part name	Material
1	Coil assembly	Class B molded coil
2	Plunger assembly	K-M31,NBR: Stainless steel, nitrile rubber PET: Polyethylene terephthalate
3	O-ring	NBR: Nitrile rubber
4	Plunger spring	SUS304: Stainless steel
5	Body	PPS: Polyphenylene sulfide
6	Gasket	NBR: Nitrile rubber
7	Cap	AC4C: Aluminum casting
8	Pilot spring	SUS304: Stainless steel
9	Pilot diaphragm assembly	SUS304,NBR: Stainless steel, nitrile rubber, PTFE: tetrafluoroethylene resin
10	Body	AC4C: Aluminum casting
11	Mainspring	SUS304: Stainless steel
12	Main diaphragm assembly	SUS304,A2017: Stainless steel, aluminum NBR,PA: Nitrile rubber, nylon resin
13	Body	AC4C: Aluminum casting




- EXA
- FWD
- HNB/G
- USB/G
- FAB/G
- FGB/G
- FVB
- FWB/G
- FHB
- FLB
- AB
- AG
- AP/
AD
- APK/
ADK
- DryAir
- EX-
XPLNprf
- XPLNprf
- HVB/
HVL
- S $\diamond$ B/
NAB
- LAD/
NAD
- Water-
Rela
- NP/NAP/
NVP
- SNP
- CHB/G
- MXB/G
- Other
valves
- SWD/
MWD
- DustColl
- CVE/
CVSE
- CCH/
CPE/D
- LifeSci
- Gas-
Combus
- Auto-
Water
- Outdoor
- SpecFld
- Custom
- Ending

PD3/PDV3-65A/80A Series

EXA
FWD
HNB/G
USB/G
FAB/G
FGB/G
FVB
FWB/G
FHB
FLB
AB
AG
AP/AD
APK/ADK
DryAir
EX-XPLNprf
XPLNprf
HVB/HVL
S◇B/NAB
LAD/NAD
Water-Rela
NP/NAP/NVP
SNP
CHB/G
MXB/G
Other valves
SWD/MWD
DustColl
CVE/CVSE
CCH/CPE/D
LifeSci
Gas-Combus
Auto-Water
Outdoor
SpecFld
Custom
Ending

Dimensions: PD3 Series




- Air operated
- PD3-65A/80A-N

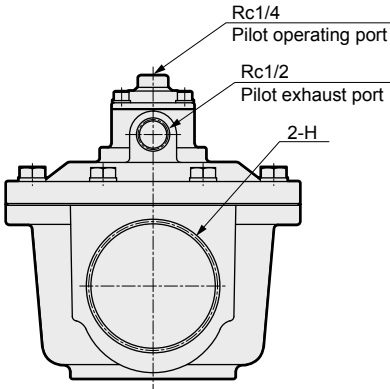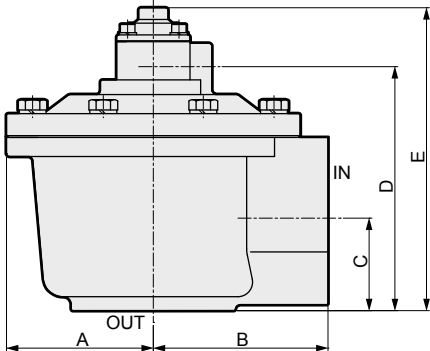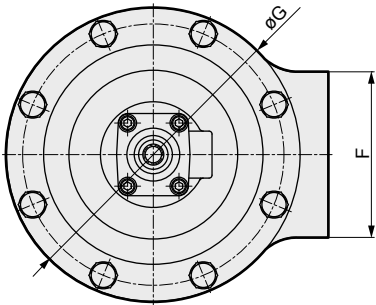

Model No.	A	B	C	D	E	F	G	H
PD3-65A-N	92	117.5	48	141	181	92	ø184	Rc2½
PD3-80A-N	100	119	63	166	206	110	ø200	Rc3

Dimensions

- Grommet lead wire with solenoid valve
- PDV3-65A/80A-N2C

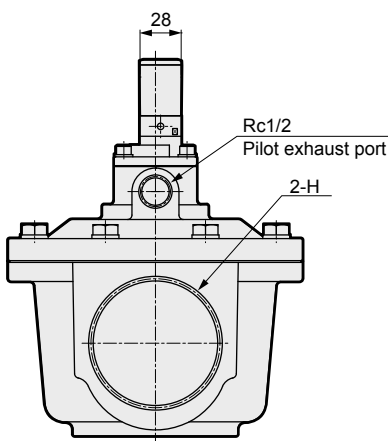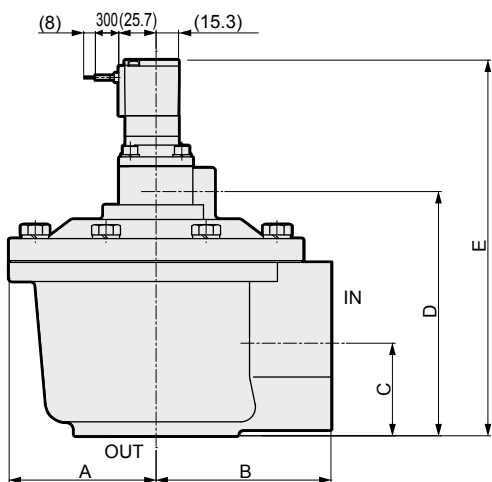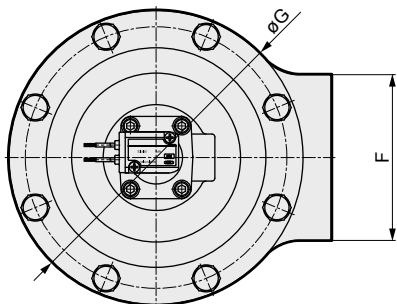


Model No.	A	B	C	D	E	F	G	H
PDV3-65A-N	92	117.5	48	141	230	92	ø184	Rc2 ¹ / ₂
PDV3-80A-N	100	119	63	166	256	110	ø200	Rc3

Optional dimensions


- DIN terminal box (with lamp)
- PDV3-65A/80A-N

2E
2G
2H

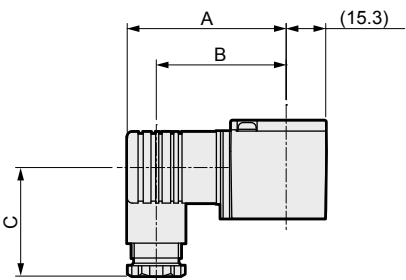

Model No.	A	B	C	D
PDV3-65A/80A-N2E	62.7	51.2	45	G1/2
PDV3-65A/80A-N2G	61.7	50.2	39	Pg11
PDV3-65A/80A-N2H	61.7	50.2	39	Pg11

EXA
FWD
HNB/G
USB/G
FAB/G
FGB/G
FVB
FWB/G
FHB
FLB
AB
AG
AP/ AD
APK/ ADK
DryAir
EX- XPLNprf
XPLNprf
HVB/ HVL
S ¹ / ₂ B/ NAB
LAD/ NAD
Water- Rela
NP/NAP/ NVP
SNP
CHB/G
MXB/G
Other valves
SWD/ MWD
DustColl
CVE/ CVSE
CCH/ CPE/D
LifeSci
Gas- Combus
Auto- Water
Outdoor
SpecFld
Custom
Ending



Pilot operated 2-port valve for dust collector
(Large port size dust collector)


PD2/PDV2 Series

- Air operated/with solenoid valve
- Port size: Rc2


RoHS

JIS symbol

- PD2 (Air operated)



- PDV2 (With solenoid valve)



Specifications

Item	Air operated		With solenoid valve	
	PD2-50A		PDV2-50A	
Working fluid	Air (no corrosive gas)			
Min. working pressure differential	MPa	0.1 (≈15 psi, 1 bar)		
Max. working pressure differential	MPa	0.7 (≈100 psi, 7 bar)		
Max. working pressure	MPa	0.7 (≈100 psi, 7 bar)		
Proof pressure (water pressure)	MPa	1.5 (≈220 psi, 15 bar)		
Fluid temperature	°C	-10 (14°F) to 60 (140°F), -10 (14°F) to 100 (212°F) for fluoro rubber seal (no freezing)		
Ambient temperature	°C	-10 (14°F) to 60 (140°F), -10 (14°F) to 100 (212°F) for fluoro rubber seal		
Atmosphere	Place free of corrosive gas and explosive gas			
Valve structure	Pilot operated poppet structure			
Valve seat leakage	cm ³ /min	50 or less		
Port size	Rc2			
Orifice size	mm	53		
Cv	62			
Pilot port size	Rc1/4		-	
Weight	kg	1.9		2.1
Mounting orientation	Unrestricted			
Working environment	Indoors/outdoors		Indoors	
Electrical specifications	PDV2			
Rated voltage	100 VAC (50/60 Hz)/110 VAC (60 Hz), 200 VAC (50/60 Hz)/220 VAC (60 Hz), 12 VDC, 24 VDC/48 VDC/100 VDC			
Voltage fluctuation range	-10 to +10% of rated voltage			
Apparent power	VA	12(50 Hz), 10(60 Hz)		
Power consumption	W	11(DC)		
Thermal class	Class 130 (B) (coil option 4A: Class 180 (H))			

*1 : For a solenoid valve for driving the air operated PD2-50A, use FAB31-8-3 (page 52), AB31-02-3 (page 154), AB41E4-02-3-03T (explosion-proof, page 424) or PJVB (page 842).

*2 : Contact CKD when using as a dust collector for ash treatment or combustion gas at a waste incinerator.

*3 : The combination of PD2 and PJVB is recommended for outdoor use.

How to order

● Air operated

PD2 - **50A** - () **S**

● With solenoid valve

PDV2 - **50A** - () **2E** - **S** - **AC100V**

Model No.

Port size
Rc2

A Sealant
*2

B Coil option
*2
*3

C Other options
*2

D Voltage
*3
*4

[Example of model No.]

PDV2-50A-2E-S-AC100V

Model: PDV2 (port size Rc2)

- A** Sealant : Nitrile rubber
- B** Coil option : With DIN terminal box (G1/2)
- C** Other options : With silencer
- D** Voltage : 100 VAC(50/60 Hz)/110 VAC(60 Hz)

		Model No.	
		PD2	PDV2
Code	Description		
A Sealant			
Blank	Nitrile rubber	●	●
F	Fluoro rubber	●	●
B Coil option			
Blank	Std. Grommet lead wire		●
2E	With DIN terminal box (G1/2)		●
2G	With DIN terminal box (Pg11)		●
2H	DIN terminal box with small lamp (Pg11)		●
3A	Open frame lead wire		●
3M	Open frame + HP terminal box (G1/2)		●
3N	Open frame + HP terminal box with lamp (G1/2)		●
4A	Open frame lead wire (thermal class H)		●
C Other options			
Blank	No option	●	●
S	Silencer (SLW-10A) (attached with the product)	●	●
D Voltage			
AC100V	100 VAC(50/60 Hz)/110 VAC(60 Hz)		●
AC200V	200 VAC(50/60 Hz)/220 VAC(60 Hz)		●
DC12V	12 VDC		●
DC24V	24 VDC		●
DC48V	48 VDC		●
DC100V	100 VDC		●

*1 : The combinations indicated with ● above are available.

*2 : For Item **A** F (sealant material: fluoro rubber), only Item **B** 4A (coil option) and Item **C** Blank (without option) are available.

*3 : When Item **B** (coil option) is "blank" or 4A, only AC voltage is available.

*4 : For voltages other than above, contact CKD.


EXA
FWD
HNB/G
USB/G
FAB/G
FGB/G
FVB
FWB/G
FHB
FLB
AB
AG
AP/AD
APK/ADK
DryAir
EX-XPLNprf
XPLNprf
HVB/HVL
S [◇] B/NAB
LAD/NAD
Water-Rela
NP/NAP/NVP
SNP
CHB/G
MXB/G
Other valves
SWD/MWD
DustColl
CVE/CVSE
CCH/CPE/D
LifeSci
Gas-Combus
Auto-Water
Outdoor
SpecFld
Custom
Ending

PD2/PDV2 Series


EXA
FWD
HNB/G
USB/G
FAB/G
FGB/G
FVB
FWB/G
FHB
FLB
AB
AG
AP/ AD
APK/ ADK
DryAir
EX- XPLNprf
XPLNprf
HVB/ HVL
S ◇ B/ NAB
LAD/ NAD
Water- Rela
NP/NAP/ NVP
SNP
CHB/G
MXB/G
Other valves
SWD/ MWD
DustColl
CVE/ CVSE
CCH/ CPE/D
LifeSci
Gas- Combus
Auto- Water
Outdoor
SpecFld
Custom
Ending

Internal structure and parts list

● Air operated
PD2-50A

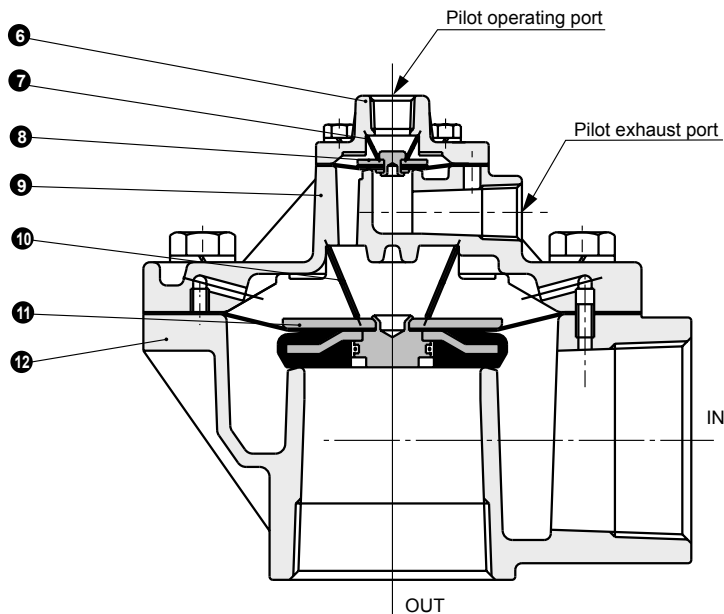



● Grommet lead wire with solenoid valve
PDV2-50A

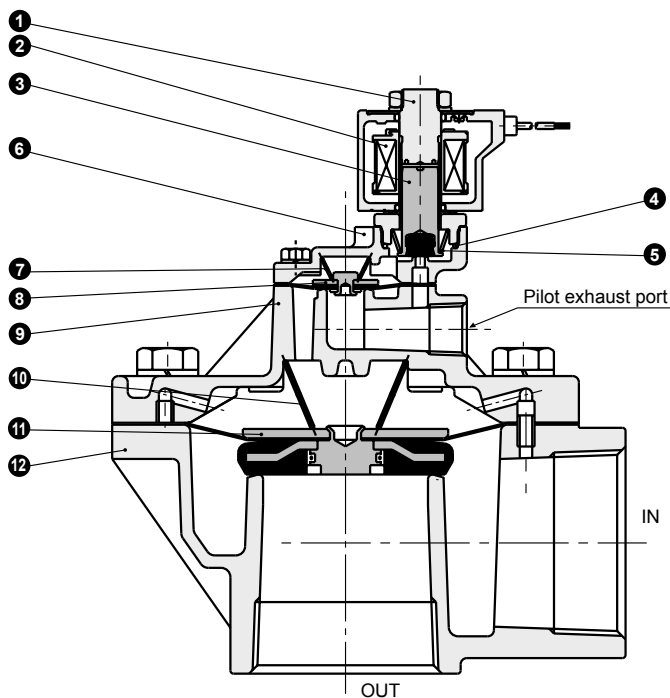



No.	Part name	Material	No.	Part name	Material
1	Core assembly	SUS405, 403, 316L : Stainless steel	7	Pilot spring	SUS304 : Stainless steel
2	Coil assembly		8	Pilot diaphragm assembly	SUS304, NBR or FKM, PTFE : S.S., NBR or FPM, TFE resin
3	Plunger assembly	SUS405, NBR or FKM : Stainless steel, nitrile rubber or fluoro rubber	9	Body	ADC12 : Aluminum die-casting
4	O-ring	NBR or FKM : Nitrile rubber or fluoro rubber	10	Mainspring	SUS304 : Stainless steel
5	Plunger spring	SUS304 : Stainless steel	11	Main diaphragm assembly	SUS304, 316L, NBR or FKM : Stainless steel, nitrile rubber or fluoro rubber
6	Cap	ADC12 : Aluminum die-casting	12	Body	ADC12 : Aluminum die-casting

Dimensions

- Air operated
PD2-50A

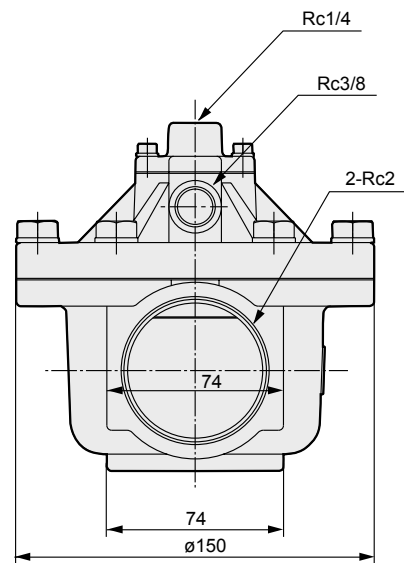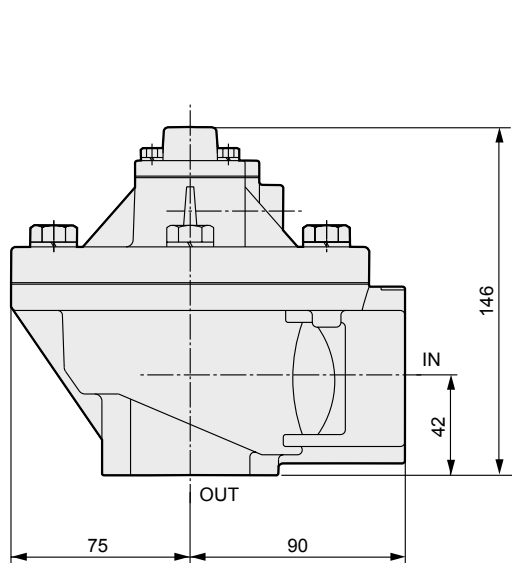

- Grommet lead wire with solenoid valve
PDV2-50A

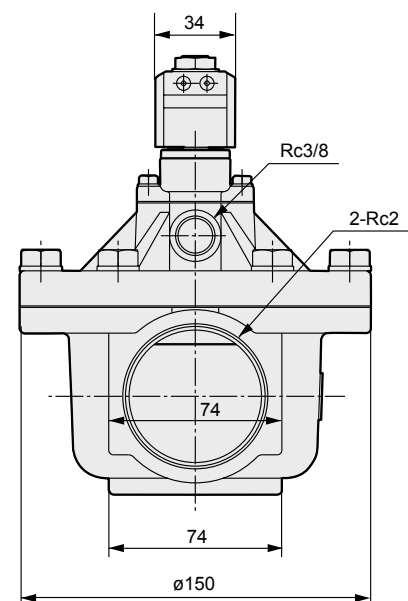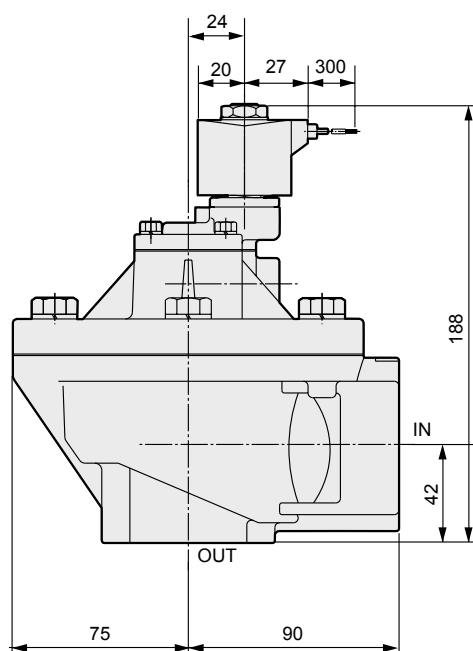

EXA
FWD
HNB/G
USB/G
FAB/G
FGB/G
FVB
FWB/G
FHB
FLB
AB
AG
AP/ AD
APK/ ADK
DryAir
EX- XPLNprf
XPLNprf
HVB/ HVL
S $\diamond$ B/ NAB
LAD/ NAD
Water- Rela
NP/NAP/ NVP
SNP
CHB/G
MXB/G
Other valves
SWD/ MWD
DustColl
CVE/ CVSE
CCH/ CPE/D
LifeSci
Gas- Combus
Auto- Water
Outdoor
SpecFld
Custom
Ending

EXA
FWD
HNB/G
USB/G
FAB/G
FGB/G
FVB
FWB/G
FHB
FLB
AB
AG
AP/ AD
APK/ ADK
DryAir
EX- XPLNprf
XPLNprf
HVB/ HVL
S◇B/ NAB
LAD/ NAD
Water- Rela
NP/NAP/ NVP
SNP
CHB/G
MXB/G
Other valves
SWD/ MWD
DustColl
CVE/ CVSE
CCH/ CPE/D
LifeSci
Gas- Combus
Auto- Water
Outdoor
SpecFld
Custom
Ending

Optional dimensions

- With DIN terminal box
DIN terminal box with small lamp
PDV2-50A-

2E


2G

2H

- Open frame lead wire
PDV2-50A-

3A

4A

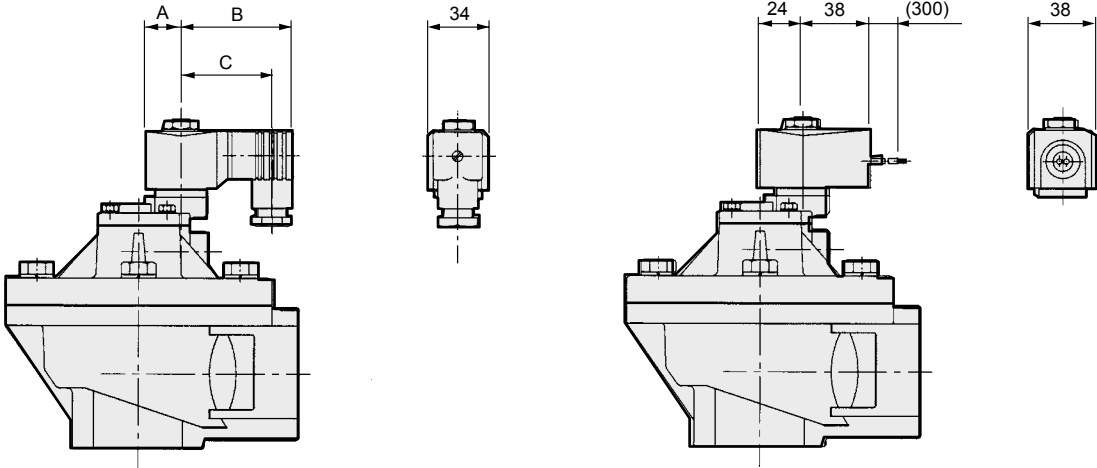

Voltage	A	B	C
AC	20	62	50.5(50)
DC	21	63.5	52(51.5)

* Dimensions shown in () are for 2E.

- Open frame with square terminal box
Open frame with square terminal box with lamp
PDV2-50A-

3M

3N

- Silencer (screw)
PD2/PDV2-*

S

