

603, 608 SERIES

Straight Line Action Clamps | Product Overview

Features:

- Allow handle to rotate and fall below mounting plane to lock in retracted position
- Large holding capacities for their size
- Available with DESTACO® Toggle Lock Plus™

Applications:

- Assembly & test
- Checking fixtures
- Welding fixtures
- Tensioning devices

Also Available:

See page MC-ACC-1 for accessories

803 Pneumatic Toggle Clamp

See page MC-PTC-23

803-ME Pneumatic Toggle Clamp

See page MC-PTC-23

Covered under one or more U.S./International Patents

603
603-M



603-SS
603-MSS
Stainless
Steel




603-R
603-MR
with
DESTACO®
Toggle Lock
Plus™



608
608-M



Technical Information | Holding Capacities



Model	Max. Holding Capacity	Weight	EF:AF (pushing/ pulling)	Plunger Travel	(M) Plunger Thread	Recommended Spindle (Not Supplied)
603	[600 lbf] 2670 N	[0.83lb] 0,38kg	23:1/34:1	[1.25] 31,8	5/16-18	207203
603-M					M8	207203-M
603-SS	[840 lbf] 3740 N				5/16-18	207943
603-MSS					M8	207943-M (supplied)
603-R	[600 lbf] 2670 N	[1.25lb] 0,57kg	44:1/50:1	[1.63] 41,3	5/16-18	207203
603-MR					M8	207203-M
608	[850 lbf] 3780 N				3/8-16	210203
608-M					M10	210203-M

HC = Holding Capacity, EF = Exerting Force, AF = Applied Force

603, 608 SERIES

Straight Line Action Clamps | Dimensions | -M/-SS/-MSS/-R/-MR

603
603-M




603-SS
603-MSS
Stainless
Steel



603-R
603-MR
with
DESTACO®
Toggle Lock
Plus™



608
608-M

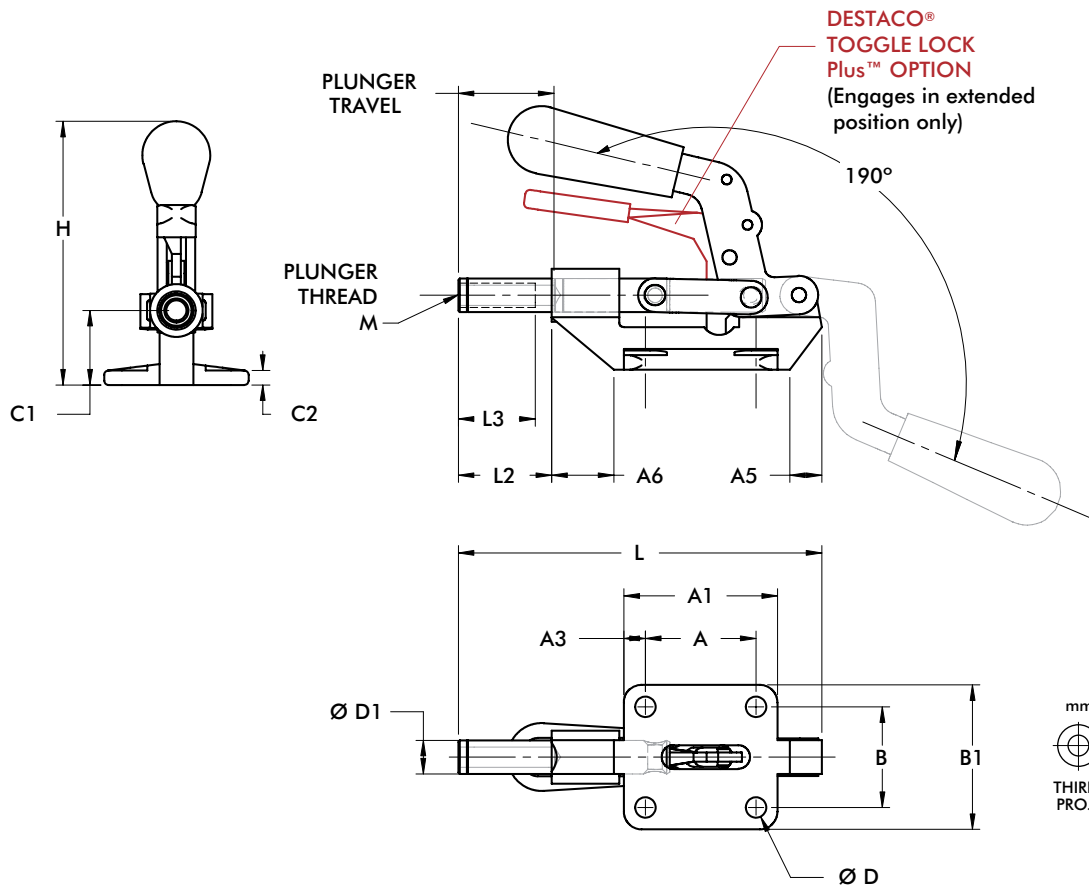

Model	A	A1	A3	A5	A6	B	B1	C1	C2	D	D1	H	L	L2	L3
603		[2.17] 55	[0.34] 8,5	[0.51] 13	[0.82] 21				[0.19] 4,8		[0.44] 11,1	[3.43] 87	[4.77] 121,2		
603-M															
603-SS	[1.44] 36,6			[0.54] 13,6	[0.65] 16,5	[1.31] 33,3	[1.88] 48	[0.97] 24,6	[0.25] 6,4	[0.27] 6,8	[0.47] 12	[3.28] 83,4	[4.69] 119,2	[1.28] 32,5	[1.00] 25,4
603-MSS		[2.20] 55,9	[0.30] 7,5												
603-R				[0.51] 13	[0.82] 21						[0.44] 11,1	[3.43] 87	[4.77] 121,2		
603-MR									[0.19] 4,8						
608	[1.63] 41,4	[2.25] 57,2	[0.31] 8	[0.75] 19	[1.40] 36	[1.63] 41,4	[2.25] 57,2	[1.25] 31,8		[0.33] 8,4	[0.62] 15,8	[4.04] 102,6	[6.00] 152,3	[1.59] 40,5	[1.25] 31,8
608-M															